




SEPTIC TANKS

THE MODERN WAY TO TREAT
YOUR EFFLUENT NATURALLY



GULF GLASS FIBRE Septic tanks are used where no underground drainage facilities are available. The sewage which is flushed into the septic tank, undergoes chemical changes due to the action of bacteria which break up the organic matter in sewage into simpler chemical compounds.

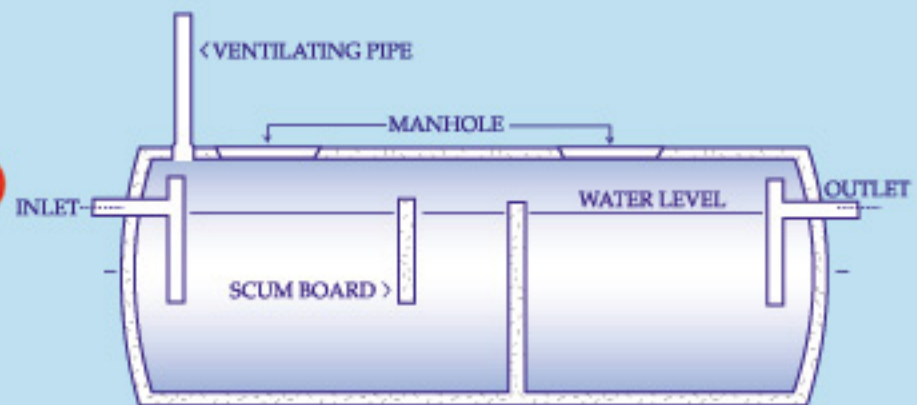

Capacities range from 1000 Gallon to 5000 Gallon. Septic tanks can be provided with support saddles, if required

- ▶ Light weight
- ▶ Rugged construction
- ▶ Simple installation
- ▶ No chemicals required
- ▶ More efficient than block/ concrete
- ▶ Inexpensive

The tanks should be positioned to take up the drain connections such that the manholes are just above the ground level. The septic tank should be filled with water before backfilling, to avoid flotation and the backfill material shall be fine, without voids and without sharp objects.



P.O. Box : 4076, Doha, Qatar Tel. : (0974) 683342, Works: 600038 Fax : 684065 E-mail : ggfworks@qatar.net.qa



Member of TEYSEER GROUP